NOTICE
THIS DRAWING EMBODIES A DESIGN ORIGINATED BY MACRO TECHNOLOGIES LLC AND ALL MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS REGARDING ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFID... RELATIONSHIP FOR A SPECIFIC PURPOSE, AND THE RECIPIENT AGREES ... ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON, OR TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HEREIN ARE EXPRESSLY RESERVED BY MACRO TECHNOLOGIES LLC.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL

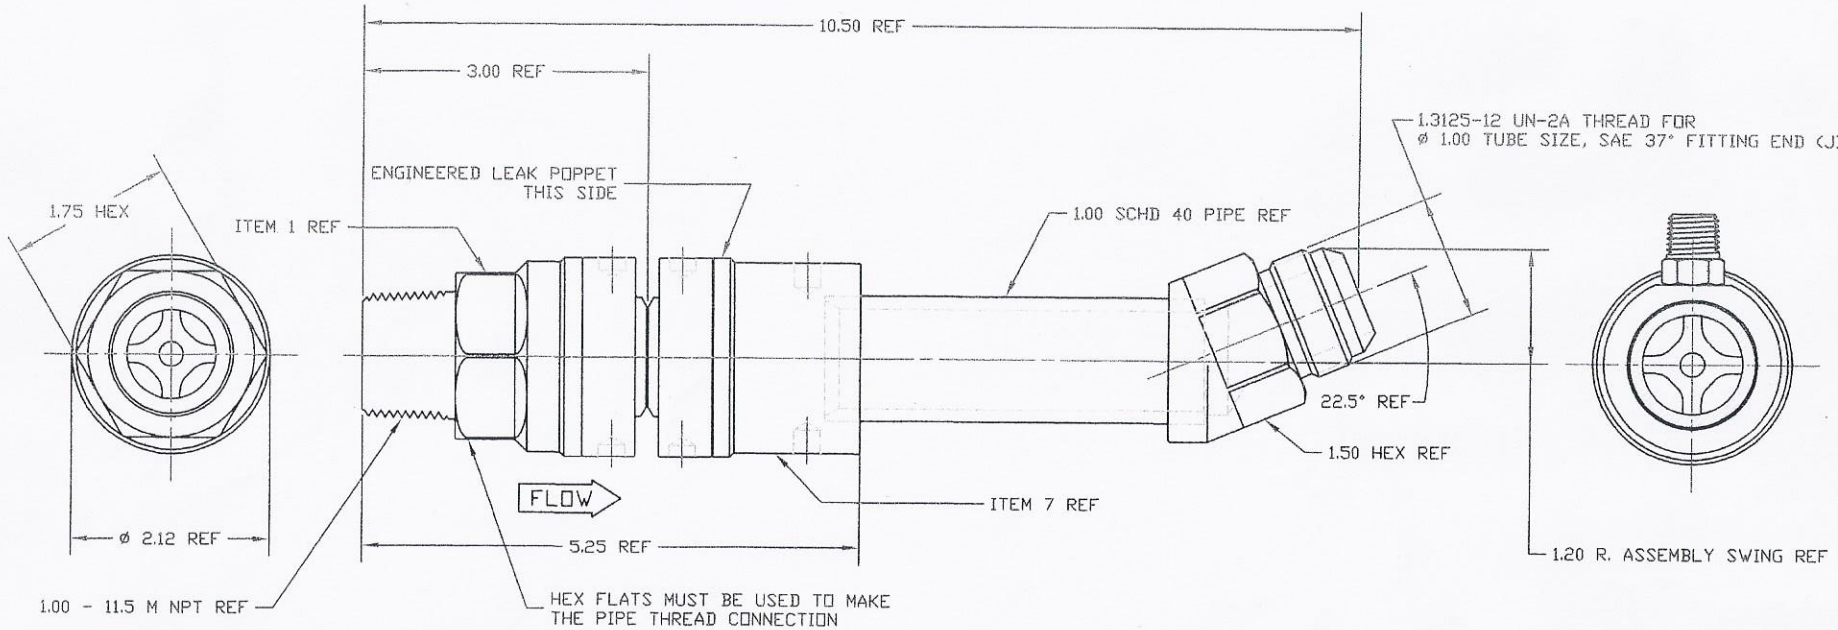

IDENTIFIED POPPET DESIGNED TO LEAK AT BREAKAWAY, PREVENTS OVER PRESSURE DUE TO LIQUID - GAS PHASE CHANGE

PERFORMANCE SPECIFICATIONS:
MEDIA: LNG FUELING SERVICE OR INERT GAS & LIQUIDS @ -320° TO +140° F SERVICE TEMP.
PRESSURE RATING: 300 PSIG FUELING, 550 PSIG MAX STATIC W.P.; BURST: 1500 PSIG
RATED FLOW: 50 GPM (LNG)
WEIGHT: 4.1 LBS AS SHOWN
AUTOMATIC MEDIA FLOW SHUT-OFF AT BREAKAWAY
MATERIALS, WETTED PARTS: BRASS, CRES & UHMW
BREAKAWAY LOAD: LEFT END FIXED AND SIDE LOAD AT FITTING END
OF 225 - 275 LBS APPLIED AT RIGHT ANGLE TO AXIS, AT -0- INTERNAL PRESSURE.
PNEUMATIC TEST: 250 PSIG DRY NITROGEN @ 70 °F
CANADIAN REGISTRATION NUMBER 0H16585.XX (WHERE XX SPECIFIES PROVINCE)
14390-2 IS IDENTICAL TO 13740-2 EXCEPT WITHOUT 14132 (SENSOR PLUG)

ASSEMBLY INSTRUCTIONS:
1. ALL COMPONENTS CLEANED PER CGA G-4.1
PACKAGED IN A SEALED POLY BAG
2. THIS UNIT IS NON-FIELD SERVICEABLE
3. PERMANENTLY MARKED ON 2IN DIAMETER OF ITEM 7:
MACRO PART NUMBER, REVISION, AND ASSEMBLY DATE CODE
OPERATING PRESSURE: 300 PSIG/20.7 BAR
4. FLOW ARROW ON FLATS OF ITEM 1, 2 PLACES, OPPOSITE SIDES.
FLOW IS LEFT TO RIGHT.
5. ORDER PART NUMBER: 14390-2
SEE S-13740-2 FOR VERSION WITH SENSOR PLUG

REFERENCE
ONLY

-2	-1	BSC	FSCM NO.	PART NUMBER	PART DESCRIPTION	MATERIAL / FINISH SPECIFICATION	ITEM
QUANTITY REQ'D					PARTS LIST		

DRILLED HOLE TOL.
.013 TO .125 = +.004 -.001
.125 TO .250 = +.005 -.001
.250 TO .500 = +.006 -.001
.500 TO .750 = +.008 -.001
.750 TO 1.00 = +.010 -.001
1.00 TO 1.50 = +.012 -.001

NEXT ASSY PART NO.	QUAN

* UNLESS OTHERWISE SPECIFIED *
ALL DIMENSIONS ARE IN INCHES AND ARE TO BE MET BEFORE PLATING
TOLERANCES ARE: DECIMALS .XX = ± .030 .XXX = ± .010; ANGULAR ± .5°
BREAK SHARP EDGES .005-.010 & REMOVE BURRS
MACHINED FILLETS TO BE .010-.000 RADIUS
CONC. = .005 TIR; SQUARENESS = .005 PER INCH
DECIMAL FINISH TO BE 100 RMS PER ASA B46.1

MATERIAL / SPEC: NOTED
HEAT TREAT / SPEC: NONE
FINISH / SPEC: NONE

CONTRACT NO.
CUSTOMER SPEC
CUSTOMER
DESIGN ACTIVITY | DATE
CHECKED BY | DATE
ENGR | DATE
DRAWN BY: GF | DATE: 02-26-14

Macro Technologies LLC
12530 - 135th Ave N.E. • Kirkland, WA • 98034

TITLE: LNG BREAKAWAY, 50 GPM FLOW
UNIFIED SCR THD, STANDARD LENGTH, NO SENSOR PLUG

SIZE	CAGE CODE	DRAWING NO.	REV
C	62529	S-14390-2	

SCALE	AQL LEVEL	SHEET	OF
NONE		1	1